


**MIL-C-55302 / 55**

**UMR-FF Series**


**Female Body / Female Contact: .100" Centers — .050" offset**

**ORDERING INFORMATION**

**MIL-C-55302 / 55**

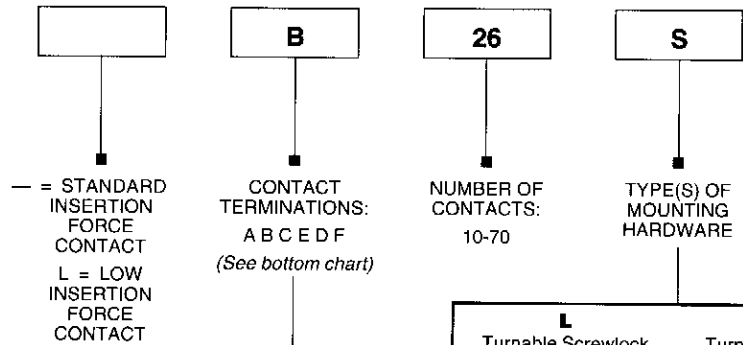


**AVAILABLE CONTACTS**

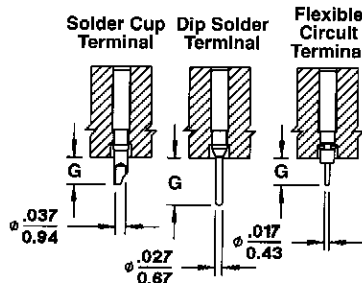

UMR / UER - FEMALE CONTACTS

Contact Style	Terminal Type	Contact Term		Extension G $\pm .010$
		CCC	MIL-C	
Female	Solder Cup	0	A	.100 (2.54)
	Dip Solder	2	B	.140 (3.56)
	Dip Solder	3	C	.172 (4.37)
	Dip Solder	4	E	.234 (5.94)
	Flexible Circuit	5	D	.058 (1.47)
	Flexible Circuit	6	F	.100 (2.54)

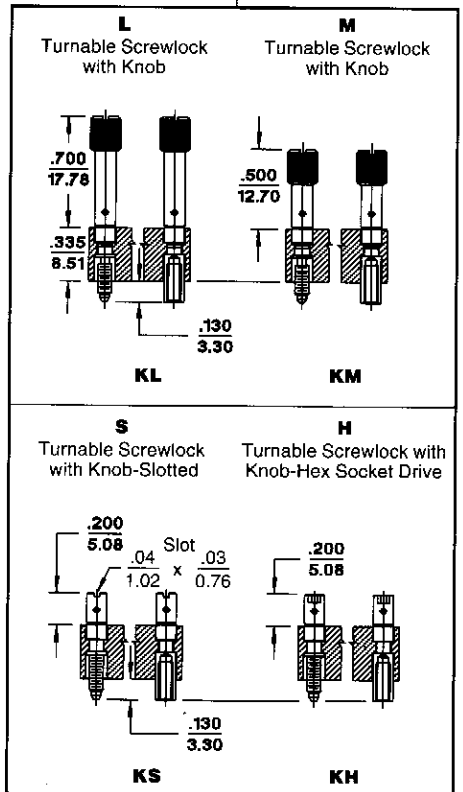

**Designation UMR**

RYTON  
POLYPHENYLENE  
SULFIDE  
MIL-M-24519  
TYPE GST-40F  
COLOR BLACK  
STANDARD

**026**

NUMBER OF CONTACTS:  
10-70

**FF**

BODY / CONTACT STYLE DESIGNATION:  
FF = FEMALE SOCKET CONTACT, CLOSED ENTRY

**2**

CONTACT TERMINATION:  
0, 2, 3  
4, 5, 6

**KS**

TYPE (S) OF MOUNTING HARDWARE.  
OTHER TYPES SHOWN ON PG. 24



**Continental Connector Company, Subsidiary Of ASC Group, Inc.**

53 La France Avenue ■ Bloomfield, New Jersey ■ 07003-5632 ■ Phone: (973) 429-8500 ■ FAX: (973) 743-2510