

HIGH DENSITY, HIGH VOLTAGE, FAST RECOVERY RECTIFIER ASSEMBLY

- Low reverse recovery time
- Low reverse leakage current
- Corona free design
- Easy aluminum base mount
- Low forward voltage drop

QUICK REFERENCE DATA


- $V_R = 2.5\text{kV} \& 5\text{kV}$
- $I_F = 2.5\text{A}$
- $t_{rr} = 150\text{nS}$
- $I_R = 1.0\mu\text{A}$

ABSOLUTE MAXIMUM RATINGS

	Symbol	SDHF2.5KS	SDHF5KS	Unit
Working reverse voltage	V_{RWM}	2.5	5.0	kV
Surge reverse voltage	V_{RSM}	2.5	5.0	kV
Average forward current in air @ 25°C in oil @ 55°C	$I_{F(AV)}$	↔ 2.5 ↔ ↔ 2.5 ↔	↔ 2.5 ↔ ↔ 2.5 ↔	A A
Non-repetitive surge current $t_p = 8.3\text{mS}, @ 25^\circ\text{C}$	I_{FSM}	↔ 150 ↔	↔ 150 ↔	A
Storage temperature range	T_{STG}	↔ -55 to +150 →	↔ -55 to +150 →	$^\circ\text{C}$
Operating temperature range	T_{OP}	↔ -55 to +150 →	↔ -55 to +150 →	$^\circ\text{C}$
Body length $\pm 0.030"$	dim C	3.36	4.04	inches

6

MECHANICAL

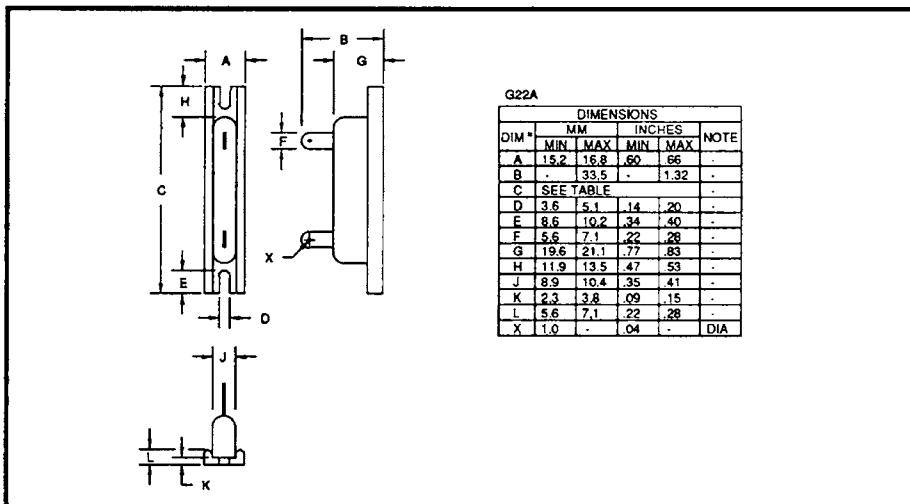

ELECTRICAL CHARACTERISTICS

	Symbol	SDHF2.5KS	SDHF5KS	Unit
Max. forward voltage drop @ $I_F = 3.0A$, $T_j = 25^{\circ}C$	V_F	6.6	13.2	V
Max. reverse leakage current @ V_{RWM} , $T_j = 25^{\circ}C$ @ V_{RWM} , $T_j = 100^{\circ}C$	I_R	1.0		μA
	I_R	25		μA
Max. reverse recovery time ¹ 0.5A I_F to 1.0A I_R . Recover to 0.25A I_{RR} .	t_{rr}	150		nS
Max. fusing current $t_p = 8.3mS$	I^2t	93		A^2S

¹ Measured on discrete devices prior to assembly

6

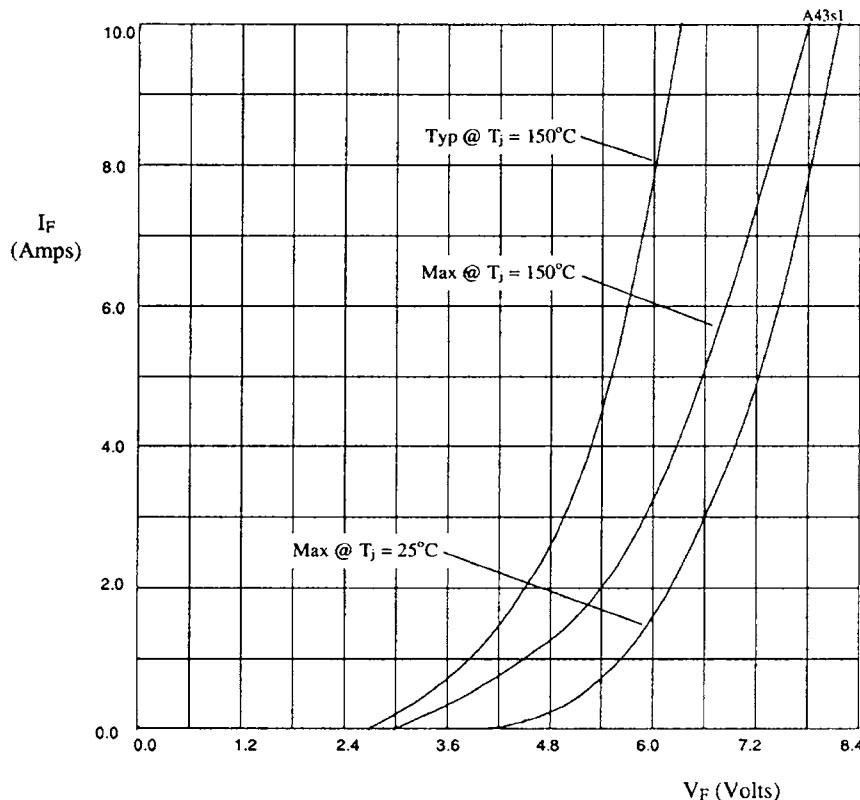


Fig 1. Forward voltage drop as a function of forward current for use with multiplication table 1.

Multiplication tables for fig 1.

SDHF2.5KS X-axis x1
SDHF5KS X-axis x2