

January 7, 1998

 AXIAL LEADED HERMETICALLY SEALED
 SUPERFAST RECTIFIER DIODE

 QUICK
 REFERENCE DATA


- Very low reverse recovery time
- Hermetically sealed with Metoxilite fused metal oxide
- Low thermal impedance
- Low switching losses
- Soft, non-snap off, recovery characteristics

- $V_R = 200 - 400V$
- $I_F = 2.1A$
- $t_{rr} = 50\text{nS}$
- $I_R = 10\mu\text{A}$

ABSOLUTE MAXIMUM RATINGS (@ 25°C unless otherwise specified)

	Symbol	USC1104	USC1105	USC1106	Unit
Working reverse voltage	V_{RWM}	200	300	400	V
Repetitive reverse voltage	V_{RRM}	200	300	400	V
Average forward current (@ 55°C, lead length = 0.375")	$I_{F(AV)}$	2.1	2.1	2.1	A
Repetitive surge current (@ 55°C in free air, lead length 0.375")	I_{FRM}	9.0	9.0	9.0	A
Non-repetitive surge current ($t_p = 8.3\text{mS}$, @ V_R & T_{jmax})	I_{FSM}	20	20	20	A
Storage temperature range	T_{STG}	-55 to +150	-55 to +150	-55 to +150	°C
Operating temperature range	T_{OP}	-55 to +150	-55 to +150	-55 to +150	°C

MECHANICAL

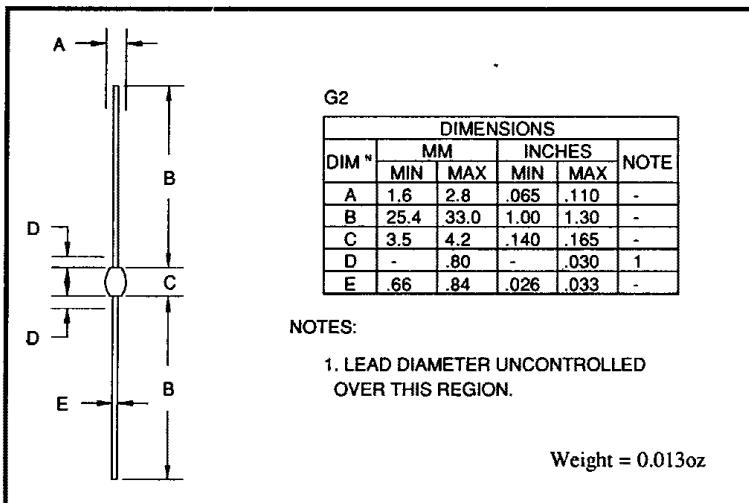

January 7, 1998

ELECTRICAL CHARACTERISTICS (@ 25°C unless otherwise specified)

	Symbol	USC1104	USC1105	USC1106	Unit
Average forward current max. (pcb mounted; T _A = 55°C) for sine wave for square wave (d = 0.5)	I _{F(AV)} I _{F(AV)}	1.0 1.1			A
Average forward current max. (T _L = 55°C; L = 3/8") for sine wave for square wave	I _{F(AV)} I _{F(AV)}	2.0 2.1			A
I ² t for fusing (t = 8.3mS) max.	I ² t	1.7			A ² S
Forward voltage drop max. @ I _F = 1.0A, T _j = 25°C	V _F	1.25			V
Reverse current max. @ V _{RWM} , T _j = 25°C @ V _{RWM} , T _j = 100°C	I _R I _R	10 200			µA
Reverse recovery time max. 0.5A I _F to 1.0A I _R . Recovers to 0.25A I _{RR} .	t _{rr}	50			nS
Junction capacitance typ. @ V _R = 5V , f = 1MHz	C _j	25			pF

THERMAL CHARACTERISTICS

	Symbol	USC1104	USC1105	USC1106	Unit
Thermal resistance - junction to lead Lead length =0.0" Lead length = 0.375"	R _{θJL} R _{θJL}	7 38			°C/W
Thermal resistance - junction to amb. on 0.06" thick pcb. 1 oz. copper.	R _{θJA}	95			°C/W